


CRANE SCALES ACCESSORIES

Datasheet




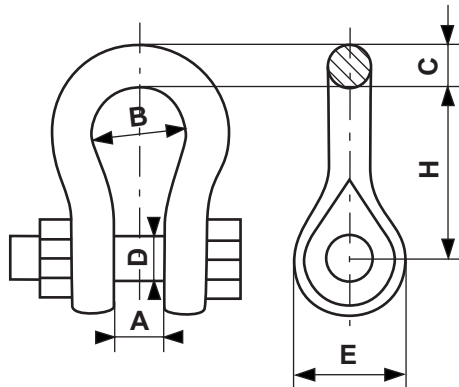

	Capacity (t)	Dimensions (mm)						Tolerance H (mm)	Weight (kg)
		A	B	C	D	E	H		
GR3	3,25	27	43	16	19	40	70	3	1
GR6	6,5	37	58	22	26	55	97	6	2
GR9	9,5	46	74	29	32	67	124	6	3,5
GR12	12	52	83	32	35	76	137	6	5
GR17	17	60	98	38	41	92	166	6	9
GR25	25	73	127	45	51	110	204	6	14
GR35	35	83	146	51	57	127	225	6	21
GR55	55	105	184	63	70	153	302	20	43

* Tolerance +/- 5 mm


GOA

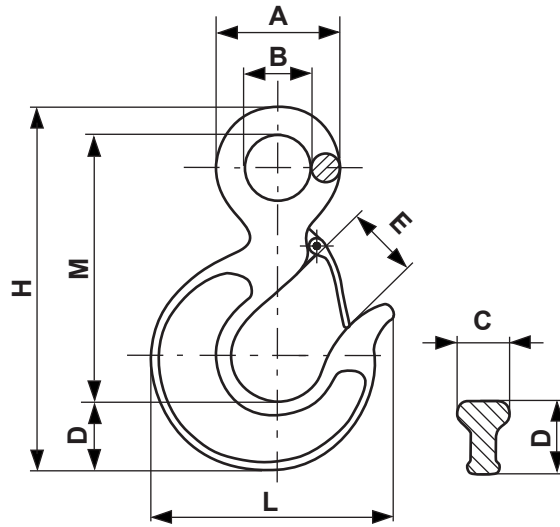

	Capacity (t)	Dimensions (mm) *								Weight (kg)
		A	B	C	D	E	H	L	M	
GOC1	1,6	53	27	21	28	25	143	90	116	0,6
GOC3200	3,2	77	40	30	40	31	202	125	160	1,6
GOA8	8	98	51	40	48	43	256	160	187	4
GOA11	11	120	62	45	58	50	316	192	230	7
GOA16	16	138	72	55	64	56	356	222	256	10
GOA22	22	169	89	65	76	80	434	280	318	17
GOA30	30	180	90	82	102	88	505	320	357	30

* Tolerance +/- 5 mm


GG

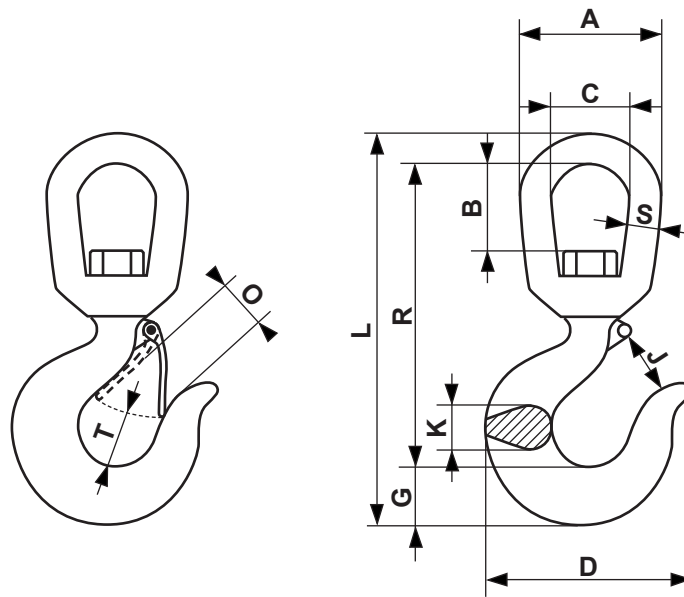

	Capacity (t)	Dimensions (mm) *											Weight (kg)	
		A	B	C	D	G	J	K	L	O	R	S		T
GG1T5	1,5	80	49	46	92	26,5	32	22,5	210	22	165	17	23,5	1
GG4	5	105	60	60	125	41	40	31	275	31	215	22	37	5
GG7	8	165	93	94	220	67	68	54	450	58	350	35	65	14,6
GG11	11,5	148	72	90	192	58	65	50	400	52	310	29	50	10
GG15	16	155	89	90	221	70	76	60	440	58	350	32	61,5	11
GG22	22	200	111	116	279	84,5	90	67	580	74	450	41	60,5	23
GG30	30	235	116	135	346	103	115	90	670	92,5	520	50	96,5	32

* Tolerance +/- 5 mm



CA



	Capacity (t)	D Ø mm	L mm *	l mm *	Weight (kg)
CA2	2	15	105	60	0,4
CA4	5	20	135	75	0,8
CA8	8	25	180	100	2,1
CA15	18	33	215	130	4,2
CA30	32	45	340	180	13
CA40	40	48	355	185	16

* Tolerance +/- 5 mm



COMPATIBILITY

		GG1T5	GG4	GG7	GG11	GG15	GG22	GG30
	Max.(t)	1,5	5	8	11,5	16	22	30
GR3	3,25	•	*	*	-	-	-	-
GR6	6,5	-	•	•	•	*	-	-
GR9	9,5	-	•	•	•	•	*	-
GR12	12	-	*	*	•	•	•	*
GR17	17	-	-	-	-	-	•	•
GR25	25	-	-	-	-	-	*	*
GR35	35	-	-	-	-	-	-	-
GR55	55	-	-	-	-	-	-	-





		GOC1	GOC3200	GOA8	GOA11	GOA16	GOA22	GOA30
		1,6	3,2	8	11	16	22	30
		-	*	•	-	-	-	-
		-	-	-	•	*	-	*
		-	-	-	-	•	•	•
		-	-	-	-	-	•	•
		-	-	-	-	-	-	*
		-	-	-	-	-	-	-
		-	-	-	-	-	-	-
		-	-	-	-	-	-	-

		CA2	CA4	CA8	CA15	CA30	CA40
	Max.(t)	8	5	8	18	32	40
GR3	3,25	•	•	*	-	-	-
GR6	6,5	•	•	•	*	-	-
GR9	9,5	•	•	•	•	*	-
GR12	12	•	•	•	•	•	*
GR17	17	•	•	•	•	•	•
GR25	25	*	•	•	•	•	•
GR35	35	-	•	•	•	•	•
GR55	55	-	-	•	•	•	•

- * upon request only
- compatible
- not compatible

		GG1T5	GG4	GG7	GG11	GG15	GG22	GG30
	Max.(t)	1,5	5	8	11,5	16	22	30
CA2	2	•	•	•	•	*	-	-
CA4	5	*	•	•	•	•	•	-
CA8	8	-	•	•	•	•	•	•
CA15	18	-	*	•	•	•	•	•
CA30	32	-	-	-	*	•	•	•
CA40	40	-	-	-	-	•	•	•



		GOC1	GOC3200	GOA8	GOA11	GOA16	GOA22	GOA30
		1,6	3,2	8	11	16	22	30
		•	•	•	•	*	-	-
		•	•	•	•	•	•	-
		*	*	•	•	•	•	•
		-	-	*	•	•	•	•
		-	-	-	*	•	•	•
		-	-	-	*	•	•	•

- * upon request only
- compatible
- not compatible



HEAD OFFICE

Via Della Fisica, 20
41042 Spezzano di Fiorano, Modena - Italy
Tel. +39.0536 843418 - Fax +390536 843521
info@diniargeo.com

SERVICE ASSISTANCE

Via Dell'Elettronica, 15
41042 Spezzano di Fiorano, Modena - Italy
Tel. +39.0536 921784 - Fax +390536 926654
service@diniargeo.com