


MCWH

MCWHU "HULK" SERIES DOUBLE SECURITY CRANE SCALES

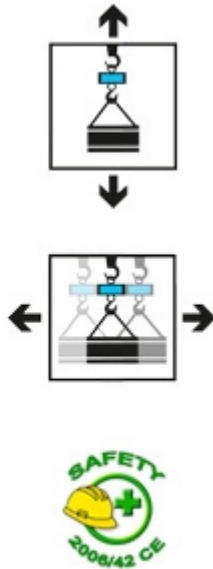

High capacity crane scales for industrial weighing, reliable and easy to use, suitable both for commercial warehouses and for more harsh environments.

Thanks to the double security system, they allow lifting, weighing and moving the suspended load and they can be installed permanently on the lifting system.

They are extremely compact in height and they take up little space. Configuration for optional upper connection ring and lower hook. The models with a capacity up to 15000 kg are supplied with a test certificate obtained with standard weights, while for higher capacities the certificate is available on request. They are available both for internal factory use and CE-M APPROVED.

Working in cooperation with:

E H OAKLEY LIMITED

Ladymead Farm Unit 4 - HP22 4AN - Aylesbury, Bucks - UNITED KINGDOM
Tel. 0044 (0) 1296 393133 Fax. 0044 (0) 1296 397070
adrian@oakleyweigh.co.uk

**The best solution
for advanced industrial
applications**

MAIN FEATURES

- Double security system, for permanent installation in the lifting system; recommended for lifting and moving the suspended load.
- In compliance with the directives 2006/42 CE, UNI EN 13155/2009, UNI EN 13889, 2014/30/EU.
- 40 mm RED LED display.
- Waterproof keyboard with 5 keys which are ZERO, AUTOMATIC TARE, MODE, PRINT, and ON/OFF.
- Protective screen in plexiglas for display and keyboard.
- Precision: +/- 0.03% F.S.
- Built extremely sturdy in oven-fire painted sheet steel, with IP67 protection degree against dust and sprays.
- Weight: 86 kg, with packaging 103 kg.
- Radiofrequency 6-key remote control, 433MHz, for use up to 50 m of distance. Configurable as automatic tare only or as a remote keypad.
- Fitted with extractable rechargeable battery pack, with 60-hour operating time, designed to be combined with MCWHBK option for 24/7 continuous use of the crane scale. Standard fitted with battery charger.
- Digital set-up and calibration programmable directly from keyboard using a sample weight.
- Operating temperature: -10 /+80°C, with optional heat shield (-10/+40°C for the CE-M approved model).
- Programmable digital filter and auto power saving function.
- Equipped with 230 Vac 50 Hz battery charger, for charging the battery from the crane scale. EU, UK, US, AU plugs as standard.

AVAILABLE FUNCTIONS FROM REMOTE CONTROL

- Zero;
- Tare;
- Enable/disable function;
- Print;
- Switch-off.

SELECTABLE FUNCTIONS

- High Resolution Weighing x 10.
- Net/Gross or lb/kg conversion.
- Accumulation.
- +/- Checkweighing.
- Percentage weighing.
- Counting.
- HOLD (lock of the displayed weight).
- PEAK (maximum value read).
- Peer-to-peer.

OPTIONS ONLY AVAILABLE AT TIME OF ORDER

- Radio frequency transmission to remote indicator up to 70 m indoors.
- WI-FI interface.
- Heat shield for protection from infrared rays and high temperatures.
- Remote weight indicator (see DFW.., 3590.., TRS.., DGT.. series weight indicators) with printer or other accessories connected through radio frequency.
- Separate 230 Vac 50 Hz recharging station for 24/7 continuous use, made up of additional battery pack and adapter for the external recharge of the battery.
- Date and Time.
- ACCREDIA calibration certificate according to OIML/ASTM standards.

DETAIL 1




MCWHU with optional ring, swivelling hook and thermal shield

DETAIL 2



Fitted with extractable rechargeable battery pack.

DETAIL 3

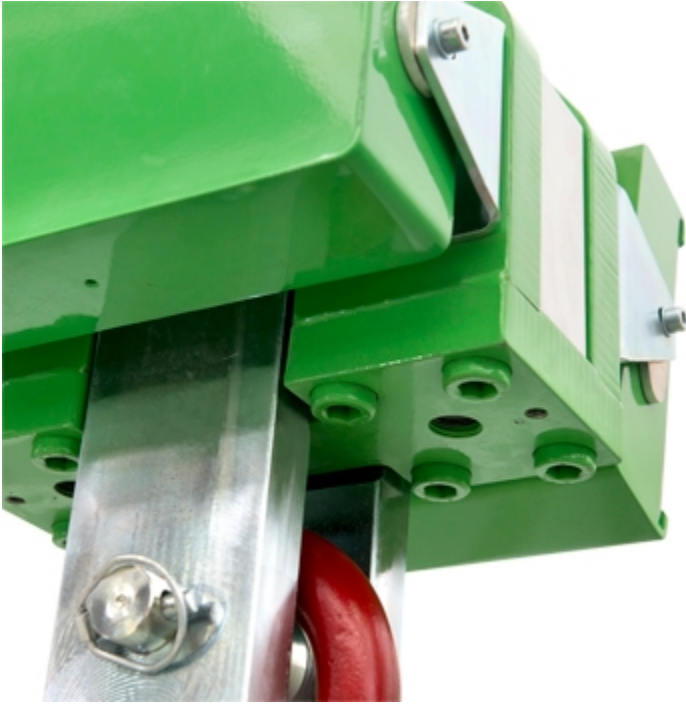

Reinforced base.

DETAIL 4



Protective screen in plexiglas for display and keyboard.

VERSIONS

Available versions

Codice	Max (kg)	d (kg)	M (kg)
MCWHU6-3	6000	1	--
MCWHU10-3	10000	2	--
MCWHU15-3	15000	2	--
MCWHU25-3	25000	5	--
MCWHU6M-3 M	6000	--	2
MCWHU10M-3 M	10000	--	5
MCWHU15M-3 M	15000	--	5



www.diniargeo.com

“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

DINI ARGEO
FRANCE sarl
France

DINI ARGEO
GMBH
Germany

DINI ARGEO
UK Ltd
United Kingdom

DINI ARGEO WEIGHING
INSTRUMENTS Ltd
China

DINI ARGEO
OCEANIA
Australia



COMPANY HEADQUARTERS

Via Della Fisica, 20
41042 Spezzano di Fiorano - Modena - Italy
Tel. +39.0536 843418

E H OAKLEY LIMITED

Ladymead Farm Unit 4 - HP22 4AN - Aylesbury, Bucks - UNITED KINGDOM

Tel. 0044 (0) 1296 393133 Fax. 0044 (0) 1296 397070

adrian@oakleyweigh.co.uk

SALES AND TECHNICAL ASSISTANCE SERVICE

All the specifications and images can be subject to variations and upgrades without prior notice.