

Compact Balances

EJ

Series



EJ-1500



EJ-120

The EJ Series compact balances are specifically designed for on-line and catalog sales. Their performance and functions are also ideally suited for the education market.

- Unique and eye-catching color design.
- Hygienic and rustproof stainless steel pan.
- Supports multiple weighing units.
- Slot in the rear for an anti-theft lock.
- Stackable body to save storage space.
- Calculates density automatically.*

* The optional density determination kit (EJ-13) is required.



Stackable body



A&D ...Clearly a Better Value
A&D Company, Limited
<http://www.aandd.jp>

Compact Balances **EJ** Series

Specifications

	EJ-120	EJ-200	EJ-300	EJ-410	EJ-610	EJ-1500	EJ-2000	EJ-3000	EJ-4100	EJ-6100	
Weighing capacity	120 g	210 g	310 g	410 g	610 g	1500 g	2100 g	3100 g	4100 g	6100 g	
Min. weighing value	0.01 g					0.1 g					
Weighing units	g, pcs, %, oz, lb, ozt, ct, mom, dwt, GN, N, SG (density), tola*, tael (HG, HJ, T)*										
Counting mode	Max. count**	12,000 pcs	21,000 pcs	31,000 pcs	41,000 pcs	61,000 pcs	15,000 pcs	21,000 pcs	31,000 pcs	41,000 pcs	61,000 pcs
	Min. unit weight**	0.01 g					0.1 g				
	No. of samples	5, 10, 25, 50 or 100 pieces									
Percent mode	Min. % display	0.1%									
	Min. 100% weight	1 g					10 g				
Repeatability (Standard Deviation)		0.01 g					0.1 g				
Linearity		±0.01 g	±0.02 g			±0.1 g		±0.2 g			
Sensitivity drift		±20 ppm/°C (10°C to 30°C / 50°F to 86°F)									
Display type		7-segment LCD with backlight (character height 16 mm)									
Display refresh rate		10 times per second									
Operating temperature		-10°C to 40°C / 14°F to 104°F, 85%RH or less (no condensation)									
Power supply		AC adapter or 4 AA batteries									
Battery operation		Approximately 70 hours (backlight off, alkaline batteries)									
Calibration mass**		100 g	200 g	300 g	400 g	600 g	1500 g	2000 g	3000 g	4000 g	6000 g
Weighing pan size		ø110 mm					127 mm x 140mm				
Net weight		Approximately 850 g					Approximately 970 g				

* For special versions only. One of them can be selected and installed at the factory.

** Factory setting

Options

EJ-13



EJ-11




- EJ-02** Quick USB interface
- EJ-03** RS-232C interface
- EJ-07** Underhook for EJ-3000 / EJ-4100 / EJ-6100
- EJ-08** Underhook for EJ-1500 / EJ-2000
- EJ-11** Breeze break
- EJ-12** Carrying case
- EJ-13** Density determination kit for EJ-120 / EJ-200 / EJ-300 / EJ-410 / EJ-610




EJ-12

Dimensions (mm/inches)

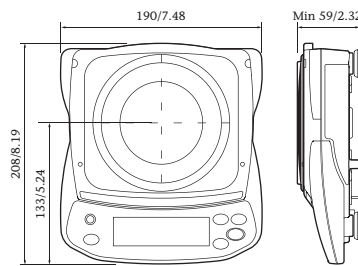

EJ-120/200/300/410/610

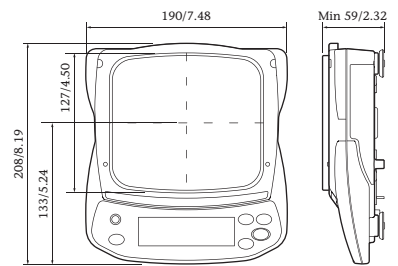

EJ-1500/2000/3000/4100/6100

A&D

...Clearly a Better Value

A&D Company, Limited

3-23-14 Higashi-Ikebukuro, Toshima-ku, Tokyo 170-0013 JAPAN
Telephone: [81](3) 5391-6132 Fax: [81](3) 5391-6148
http://www.aandd.jp

A&D ENGINEERING, INC.

1756 Automation Parkway, San Jose, CA 95131 U.S.A.
Telephone: [1](408) 263-5333 Fax: [1](408) 263-0119

A&D Australasia Pty Ltd.

32 Dew Street, Thebarton, South Australia 5031 AUSTRALIA
Telephone: [61](8) 8301-8100 Fax: [61](8) 8352-7409

A&D INSTRUMENTS LTD.

Unit 24/26 Blacklands Way Abingdon Business Park,
Abingdon, Oxon OX14 1DY UNITED KINGDOM
Telephone: [44](1235) 550420 Fax: [44](1235) 550485

<German Sales Office>

Große Straße 13 b 22926 Ahrensburg GERMANY
Telephone: [49](0) 4102 459230 Fax: [49](0) 4102 459231

A&D KOREA Limited

Manhattan Bldg. 8F, 36-2 Yoido-dong, Youngdeungpo-gu, Seoul, KOREA
Telephone: [82](2) 780-4101 Fax: [82](2) 782-4280

A&D RUS CO., LTD.

Verenskaya str.17, Moscow, 121357 RUSSIA
Telephone: [7] (495) 937-33-44 Fax: [7] (495) 937-55-66

A&D Instruments India Private Limited

509 Udyog Vihar Phase V
Gurgaon-122 016, Haryana, INDIA
Telephone: [91](124) 471-5555 Fax: [91](124) 471-5599