

Midrics complete scale


Stainless steel




- 2 Display and Control Units
- 10 weighing ranges from 3 kg to 3 t
- 13 platform dimensions
- 2 verifiable versions, accuracy class III, resolution 3.000 e and 2 x 3.000 e
- 1 version non verifiable, resolution 15.000 d

Platforms


a (mm)	b (mm)	c (mm)	d (mm)	e (mm)	Design
320	240	85...100	275	195	...DC -
400	300	96...111	356	256	...ED -
500	400	110...125	455	355	...FE -
650	500	140...160	603	453	...GF -
800	600	140...160	752	552	...IG -
800	800	100...105	700	700	...II -
1000	800	100...105	900	700	...LI -
1000	1000	100...105	900	900	...LL -
1250	1000	100...105	1150	900	...NL -
1250	1250	100...105	1150	1150	...NN -
1500	1250	100...105	1400	1150	...RN -
1500	1500	100...105	1400	1400	...RR -
2000	1500	100...105	1900	1400	...WR -

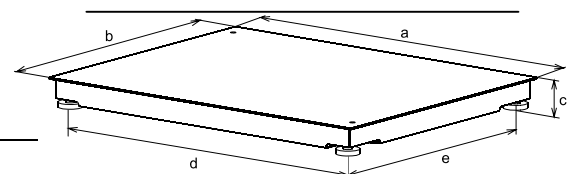

Design3: ..II, ..LI, ..LL, ..NL, ..NN, ..RN, ..RR, ..WR




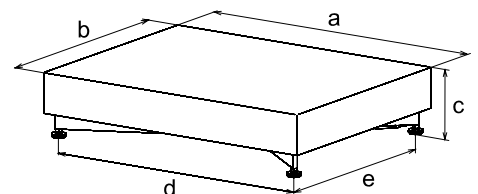


Design2: ..GF, ..IG

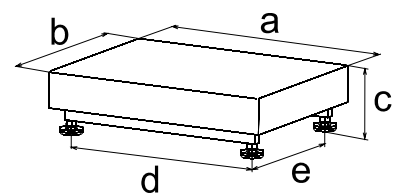

Design1: ..DC, ..ED, ..FE

Display- and Control unit



MW1S	Data interface:	Optional, 2	Display:	20 mm LCD, backlit
MW2S	Data interface:	Optional, 2	Display:	20 mm LCD, backlit
			Others:	Numeric keypad

Resolution (depends on the readability of the scale)

- NCE	2 x 3.000 e, verification scale intervals
- LCE	3.000 e, verification scale intervals
- L	15.000 d, scale intervals (digits)



Specifications

Maximum readability:	15.000d
Accuracy class:	Klasse III
Number of verification scale intervals:	3.000e, 2 x 3.000e
Data interface:	optional
Power supply:	100-240 V/AC
DC power supply:	optional, 24V/DC
AC power supply:	optional, 24V/AC
Temperature range:	-10°C ... +40°C
Electrical safety:	EN61010-1, EN60950 IEC1010-1, IEC950
Display- and Control unit:	remoted, optional with column for connecting to platform
Version:	All in Stainless steel 1.4301 (V2A) Display- and Control unit IP65
Ingress Protection Rate:	Platform IP 67 (load cell IP 68)
Weighing system:	Design1 and design2 : Stainless steel Single Point load cell C 3 Design3 : 4 load cells C3
Load plate:	Stainless steel 1.4301 AISI 304
Others:	4 adjustable leveling feet Built-in level indicator Overload stop
Battery operation:	Optional via internal or external rechargeable battery pack
Limitation of emissions:	EN61326 Kl. B, (IEC61326)
Defined immunity to interference:	EN61326 Ind. (IEC61326)

Example-Order number MW1S1-60FE-L

Part1:	MW1S	Display- and Control unit:	Application: Weighing
Part2:	1-60FE	Platform:	60kg, L=500 mm x B = 400 mm
	-L	Resolution:	5g resolution, non verifiable

Platform

Order no.	Weighing capacity in kg	Readability in g non verifiable - L	verifiable		Material E: Stainless steel		Length platform cable in m
			-LCE	-NCE	Load plate	Base frame	
1-3DC	3	0,2	1	0,5 / 1	E	E	2,5
1-6DC	6	0,5	2	1 / 2	E	E	2,5
1-15DC	15	1	5	2 / 5	E	E	2,5
1-30ED	30	2	10	5 / 10	E	E	2,5
1-30FE	30	2	10	5 / 10	E	E	2,5
1-60ED	60	5	20	10 / 20	E	E	2,5
1-60FE	60	5	20	10 / 20	E	E	2,5
1-60GF	60	5	20	10 / 20	E	E	2,5
1-60IG	60	5	20	10 / 20	E	E	2,5
1-150FE	150	10	50	20 / 50	E	E	2,5
1-150GF	150	10	50	20 / 50	E	E	2,5
1-150IG	150	10	50	20 / 50	E	E	3
4-150II	150	10	50	20 / 50	E	E	6
4-150LL	150	10	50	20 / 50	E	E	6
4-150NN	150	10	50	---	E	E	6
1-300GF	300	20	100	50 / 100	E	E	2,5
1-300IG	300	20	100	50 / 100	E	E	2,5
4-300II	300	20	100	50 / 100	E	E	6
4-300LL	300	20	100	50 / 100	E	E	6
4-300NN	300	20	100	50 / 100	E	E	6
4-600II	600	50	200	100/200	E	E	6
4-600LI	600	50	200	100/200	E	E	6
4-600LL	600	50	200	100/200	E	E	6
4-600NL	600	50	200	100/200	E	E	6
4-600NN	600	50	200	100/200	E	E	6
4-600RN	600	50	200	100/200	E	E	6
4-600RR	600	50	200	100/200	E	E	6
4-600WR	600	50	200	100/200	E	E	6
4-1500-II	1500	100	500	200/500	E	E	6
4-1500LI	1500	100	500	200/500	E	E	6
4-1500LL	1500	100	500	200/500	E	E	6
4-1500NL	1500	100	500	200/500	E	E	6
4-1500NN	1500	100	500	200/500	E	E	6
4-1500RN	1500	100	500	200/500	E	E	6
4-1500RR	1500	100	500	200/500	E	E	6
4-1500WR	1500	100	500	200/500	E	E	6
4-3000II	3000	200	1000	500/1000	E	E	6
4-3000LI	3000	200	1000	500/1000	E	E	6
4-3000LL	3000	200	1000	500/1000	E	E	6
4-3000NL	3000	200	1000	500/1000	E	E	6
4-3000NN	3000	200	1000	500/1000	E	E	6
4-3000RN	3000	200	1000	500/1000	E	E	6
4-3000RR	3000	200	1000	500/1000	E	E	6
4-3000WR	3000	200	1000	500/1000	E	E	6

Sartorius AG
Weender Landstraße 94-108
37075 Göttingen

Tel. 0551.308.0
Fax 0551.308.3495

www.sartorius.com