

TPWLKI

TPWLKI SERIES STAINLESS STEEL PALLET TRUCK SCALE



Stainless steel pallet truck scales with built-in multirange electronic weighing, easy to use. Weight detection with four IP68 stainless steel load cells. Sturdy structure suitable for harsh work conditions. Available also CE-M APPROVED.

**The best solution
for advanced industrial
applications**

MAIN FEATURES

- Maximum lifting capacity: 2000 kg.
- Accuracy: +/- 0.1% of the maximum capacity in the versions for internal use.
- Accuracy: +/- 0.05% of the maximum capacity in the "M" approved versions.
- Fork dimensions 1180 x 550 x 80 mm. Weighs about 135 kg.
- Bearing structure in extra thick STAINLESS steel.
- Lifting pump in STAINLESS steel.
- Steering wheels and double loading rollers in nylon.
- Closed forks, for a higher protection of the double loading wheels.
- 4 IP68 stainless steel shear beam load cells.
- IP65 stainless steel weight indicator, easy to clean and resistant to harsh and corrosive environments; large 25mm backlit LCD display, clearly visible also in poor lighting conditions.
- Calibration and Set-Up from keyboard or from PC.
- Power supply through built-in rechargeable battery.
- 80-hour approximate operating time or one month with the typical non continuous use, thanks to its auto switch-off function.
- Programmable auto power saving function.
- Low battery warning.
- Equipped with 230Vac 50 Hz battery charger.
- Bi-directional RS232/C port for connection to printer.
- Bi-directional RS232/C port for PC, radio modem, or portable terminal.
- IR input for managing the remote control.
- Fitted with thermal printer in the TPWLKIP and TPWLKIPM versions.

AVAILABLE UPON PRICE ESTIMATE

- Special capacity e/o divisions.
- High resolution.

MAIN FUNCTIONS

- The user can select the operating modes directly using the dedicated key*:
 - High resolution display x 10
 - Precision weighing with temporary recalibration via a sample weight (for internal factory use)
 - Net/Gross
 - Lb to Kg converter
 - Free conversion factor (for meter and litre counters etc.)
 - Weight totalizer
 - Formulizer
 - +/- controller with quick target and threshold input
 - Percentage weighing
 - Percentage batching with programmable target
 - Piece counter
 - Hold
 - Alibi memory (optional)
- Access to the user menu is gained using the dedicated key* to adjust the weighing filter, date and time, setpoint and tare weight, which the user can access by entering a programmable access password.

* These quick access keys to the menus can be blocked by configuring a dedicated password.

DETAIL 1



DETAIL 2



VERSIONS

Available versions

Codice	Max (kg)	d (kg)	M (kg)
TPWLKI-2	500 / 1000 / 2000	0,2 / 0,5 / 1	--
TPWLKIM-2 M	1000 / 2000	--	0,5 / 1
TPWLKIP-2	500 / 1000 / 2000	0,2 / 0,5 / 1	--
TPWLKIPM-2 M	1000 / 2000	--	0,5 / 1



www.diniargeo.com



“YOUR WORLDWIDE PARTNER FOR WEIGHING”

DINI ARGEO
FRANCE sarl
Nogent-sur-Marne
info.fr@diniargeo.com

DINI ARGEO
GMBH
Sinsheim - Germany
info.de@diniargeo.com

DINI ARGEO
UK Ltd
Taunton - United Kingdom
info.uk@diniargeo.com

DINI ARGEO WEIGHING
INSTRUMENTS Ltd
Shanghai - China
info.cn@diniargeo.com

DINI ARGEO
WEIGHBRIDGES
Calto (RO) – Italy
info@diniargeo.com




HEAD OFFICE

Via Della Fisica, 20
41042 Spezzano di Fiorano Modena - Italy
Tel. +39.0536 843418 Fax. +39.0536 843521
info@diniargeo.com

SERVICE ASSISTANCE

Via Dell'Elettronica, 15
41042 Spezzano di Fiorano Modena - Italy
Tel. +39.0536 921784 Fax. +39.0536 926654
service@diniargeo.com

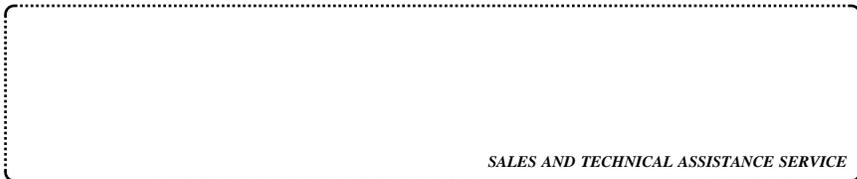

SALES AND TECHNICAL ASSISTANCE SERVICE